

# FERMAX



## Way kits

Fermax presents the WAY kits: a range of video door entry system kits for homes and offices.

A range of kits available for all type of users, because of its simple operation (intuitive management with graphic icons), easy use and reduced cost. Because today it's no longer a luxury to have a video door entry system at home, WAY IS THE WAY. For us, for you, for all. Do it your Way!

### Technology

⊕ 2 wires non polarised

Plug&Play

Do it your way





1 residence



2 residences



## Residential



### WAY VIDEO DOOR ENTRY KITS FOR 1 & 2 RESIDENCES

**FERMAX**

Designed for homes, the **WAY VIDEO DOOR ENTRY SYSTEMS KITS** for 1 and 2 residences include a WAY DOOR ENTRY PANEL of 25mm width made of zamak with a wide angle CCD colour camera.

The outdoor panel incorporates a lighting sensor, a hood to protect the panel from the rain and backlighted cardholders.

Surface installation.

With the Power Supply included in the kit, it is possible to connect a 12Vdc 250mA Door Lock maximum.

#### Technology

⊕ 2 wires non polarised

Plug&Play



# Commercial

Technology on the service of privacy and security.

For offices, businesses, schools, hospitals, work centres...where there is an area that needs to be controlled and restricted, the **WAY KIT PROX** does it in a very simple way.

The WAY PROX door entry panel includes a proximity reader and allows access without requiring a key. Just by presenting the proximity keying to the panel, you can open the door. The equipment can register up to **320 different users**.

Made of stainless steel (316), it resists all the most adverse conditions in extreme environments. Hood included.

The panel incorporates a backlit cardholder in different colours depending on the state of the communication: standby (blue), calling (orange), communication (intense blue) and open door (green), allowing for ease of use.

With the Power Supply included in the kit, it is possible to connect a 12Vdc 250mA Door Lock maximum.



**Technology**  
2 wires | non polarised  
**Plug&Play**

WAY VIDEO DOOR ENTRY KIT WITH PROXIMITY READER





# Way Monitor

## WITH TOUCHSCREEN AND GRAPHIC ICONS

The WAY video door entry monitor is an extraslim terminal with only 18mm width, rounded borders and glass surface on the front surface.

It incorporates a digital 7" TFT colour screen (800x480 pixels) with capacitive and touchscreen technology that allows the management of the various on-screen functions through the use of intuitive graphic icons.



On/Off



Missed call

Someone called you and you were not at home. Review the call history with images and videos of your most recent visitors



Door opener



Monitor-panel communication

Activate/deactivate the hands-free communication between the monitor and the door entry panel. Allow the auto start of the door entry panel camera



Photo camera

Take a picture of your visitor during the conversation with the door entry panel



Lock 1

Open the door from the main door entry panel

Lock 2

Open the door from the secondary door entry panel in case of installation with WAY relay



Speakers

Answer the call and control the volume of the conversation



Settings

Access to the parameters to configure the monitor


# FERMAX

## Features



CAPTURE PICTURES AND  
RECORD VIDEOS

After 3 seconds, the monitor automatically takes a photo of the visitor or records a video (in case there is a micro SD Card installed in the monitor). While answering a call, you can also take a picture manually. The recorded videos/photos from the outdoor panel will be played on the monitor's screen.



CALL HISTORY

**Capacity:**  
118 pictures (without micro SD Card) or recorded up to 32G (with micro SD Card).

All the calls from the outdoor panel to the monitor or in between monitors are registered including such information as date, time and picture of the visitor. This information can be reviewed at any moment.



DO NOT DISTURB



"Do not disturb" function: 1 hour, 8 hours or permanently.



INTERCOM  
BETWEEN MONITORS

Establish communication between monitors installed in the same residence.

The 2 lines WAY kit incorporates the option to call another residence.



SETTINGS

Choose among 20 different melodies, program the volume of the ringtone in day mode or night mode, etc.



# Kits for residences, offices and businesses



Technology

2 wires non polarised

Plug&Play

## 1/W VIDEO WAY KIT

ref.1401



The kit includes:

- 1/W video door entry panel (ref.1416).
- 7" TFT capacitive screen colour WAY monitor (ref.1412).
- Hood: to protect the outdoor panel in rainy areas.
- Power Supply (ref.1410).



## 2/W VIDEO WAY KIT

ref.1402



The kit includes:

- 2/W video door entry panel (ref.1417).
- 7" TFT capacitive screen colour WAY monitor (2 units) (ref.1412 and ref.1413).
- Hood: to protect the outdoor panel in rainy areas.
- Power Supply (ref.1410).



## 1/W VIDEO WAY PROX KIT

ref.1403



The kit includes:

- 1/W video door entry panel with proximity reader (ref.1411).
- 7 proximity keyfobs: 2 master keyfobs to register/delete users + 5 keyfobs for users.
- 7" TFT capacitive screen colour WAY monitor (ref.1412).
- Hood: to protect the outdoor panel in rainy areas.
- Power Supply (ref.1410).



### For additional users

ref.4515  
ref.23361

Proximity Keyfob  
Proximity Keycard



### Accessories

ref.1418 Way Relay

Activates an additional function such as opening a second door with no extra wiring.



# Extensions +

The WAY kits can be extended with a second monitor in the house without extra power supply. The power supply included in the kit is sufficient for a door lock requiring 12Vdc max 250mA. An extra power supply is necessary if locks with a higher power rating are used.

1/W WAY KIT  
ref.1401  
1/W WAY  
PROX KIT  
ref.1403



ref.1412 WAY MONITOR

2/W WAY KIT  
ref.1402




ref.1412 WAY MONITOR  
(for 1<sup>st</sup> residence)


ref.1413 WAY MONITOR  
(for 2<sup>nd</sup> residence)

## DIMENSIONS (width)x(height)x(depth)mm

KIT WAY




KIT WAY PROX



- Made of zamak.
- Backlighted cardholder.
- Colour CCD camera with high sensitivity.
- Auto-sensor led illumination.
- One relay lock control.
- Dimensions: 95(W) x 155(H) x 39(D)mm.
- Installation with hood required.
- Surface mounted.

- Made of stainless steel.
- Backlighted cardholder.
- Colour CCD camera with high sensitivity.
- Auto-sensor led illumination.
- One relay lock control.
- Dimensions: 93(W) x 182(H) x 44(D)mm.
- Installation with hood required.
- Surface mounted.

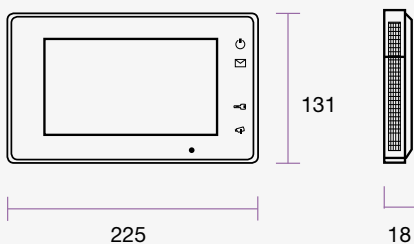

- Power supply for the monitor: DC 24~28V.
- Energy consumption: Standby 12mA; Functioning 350mA.
- Monitor screen: 7" digital colour TFT. Capacitive touch screen.
- Wiring: 2 non polarized wires.
- Dimensions: 225(W) x 131(H) x 18(D) mm.

## Easy to install

The WAY KIT offers lots of benefits to the professional installer:

1. The WAY KITS AND ADDITIONAL MONITORS are already programmed.


### Plug&Play

2. The use of 2 non-polarised wires makes the installation quick and simple.

### Technology

⊕ 2 wires non polarised

3. The WAY KITS allow for up to 160mtrs distance between the door panel and the monitor.

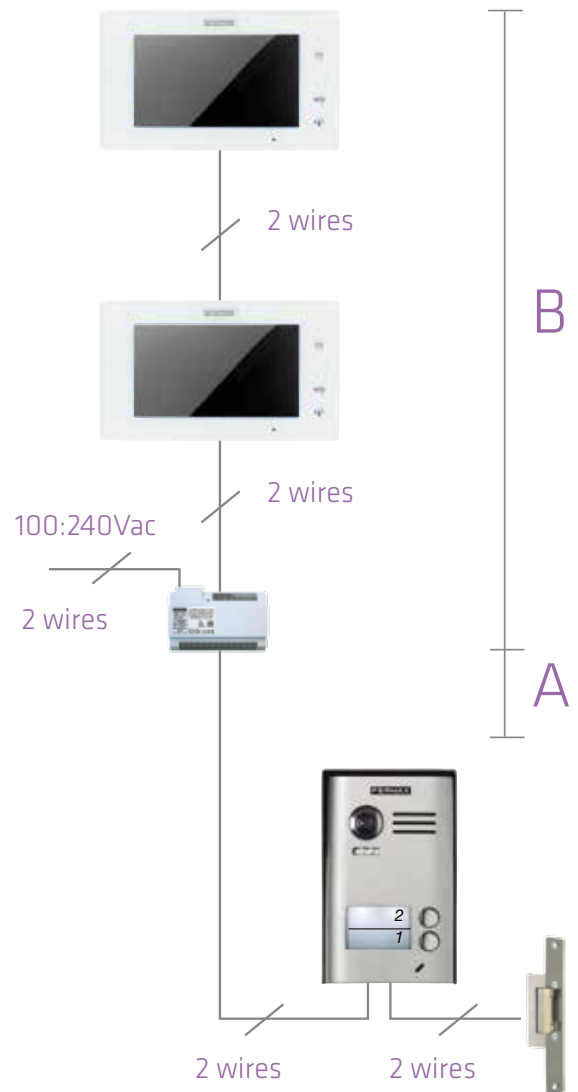

WIRING	A	B
Twisted pair 2x0,75mm <sup>2</sup>	60	60
Twisted pair 2x1mm <sup>2</sup>	80	80



[www.fermax.com](http://www.fermax.com)

Do it your 